


Type n° T-AT861/T-AT862/T-AT863

SMAL PANEL TETRA ANTENNA 380÷470MHz 90° VERTICAL POL INDOOR/OUTDOOR APPLICATION

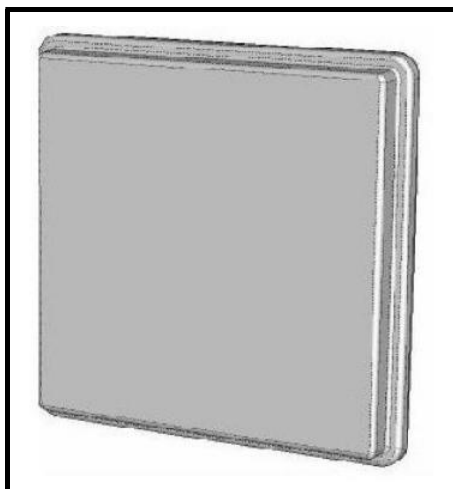

ELECTRICAL SPECIFICATIONS:

Frequency range(MHz):

T-AT861: 380 ÷ 405

T-AT862: 405 ÷ 430

T-AT863: 450 ÷ 470

Gain(dBi): 7

Impedance(Ohm): 50

Polarization: vertical

VSWR: < 2

Beam width(horiz): 90 ± 5

Average input power(W): 50

Operating.temp.range(°C): -40 ÷ +70

Lightning protection: DC grounded

MECHANICAL SPECIFICATIONS:

Connector: Nf




Fixing: wall or pole

Dimensions(mm): 353x353x43

Colour: RAL 7035

RoHs: compliant

Environmental tests: according to
ETSI 300-019-2

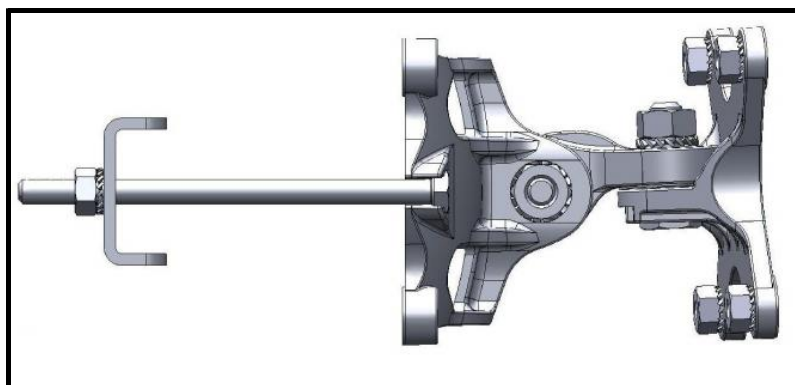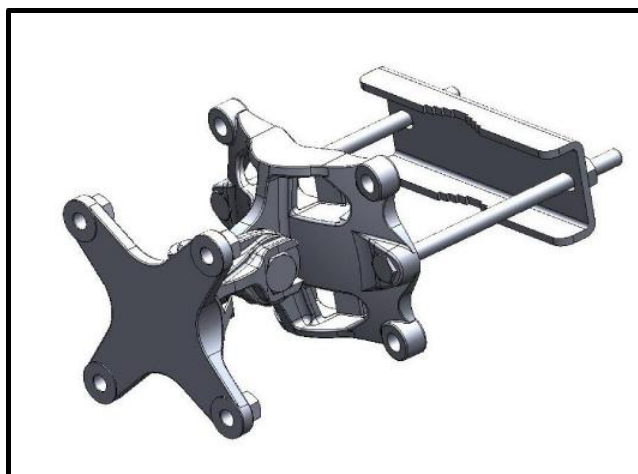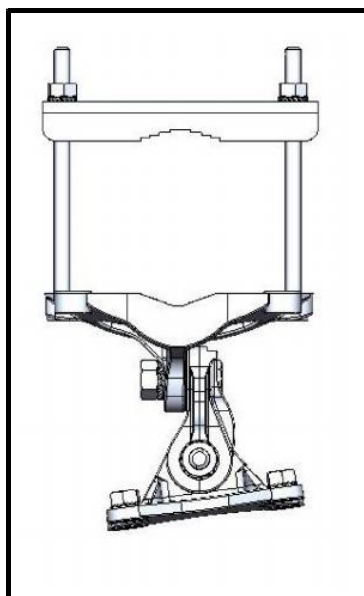

MOUNTING