

Type n° T-OC380/430.07

OMNIDIRECTIONAL ANTENNA UHF 380 ÷ 430 MHz

TECHNICAL DATA:

Impedance (Ohms): 50
Frequency range: 380 ÷ 430 MHz
V.S.W.R: less than 1.85
Beamwidth -3 dB: 22°
Polarization: Vertical
Connector: N-female
Mounting: on masts from 33 to 60 mm diam.


Gain (dBi): 7
Max power (W): 200
Wind resistance: 180 Km/h
Temperature (°C): -40° - +85°
Dimensions (mm): 2300±200
Net weight (g): 2200±200

Material

Bracket: Aluminium alloy EN AB-44100
Cylindric mast: Epox glass
Screws and nuts: Stainless steel

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE.

V.S.W.R. CURVE

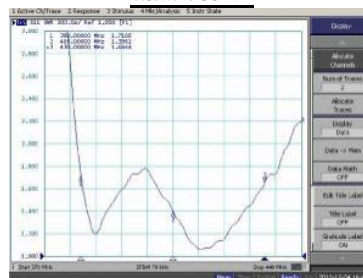

MONTAGGIO INTERNO STAFFA



MONTAGGIO ESTERNO STAFFA

