


Type n° T-OD165/174.02

OMNIDIRECTIONAL ANTENNA VHF 165 ÷ 174 MHz

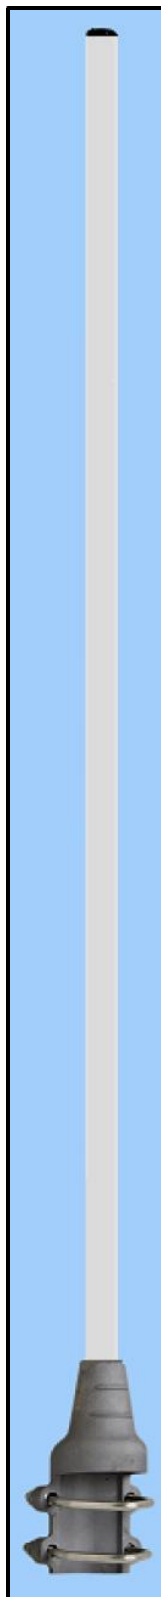


TECHNICAL DATA:


Impedance (Ohms):	50
Frequency range:	165 ÷ 174 MHz
V.S.W.R:	less than 1.5
Beamwidth -3 dB:	78°
Polarization:	Vertical
Connector:	N-female
Mounting:	on masts from 33 to 60 mm diam.
Gain (dBi):	2
Max power (W):	100
Wind resistance:	160 Km/h
Temperature (°C):	-40° - +85°
Dimensions (mm):	1270
Net weight (g):	1200
Material	
Bracket:	Aluminium alloy EN AB-44100
Cylindric mast:	Epox glass
Screws and nuts:	Stainless steel

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

V.S.W.R. CURVE

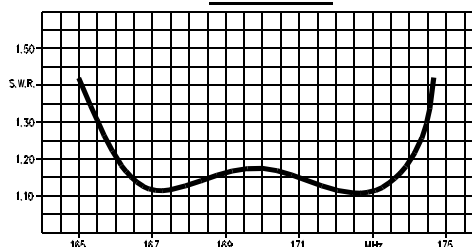

RADIATION PATTERN

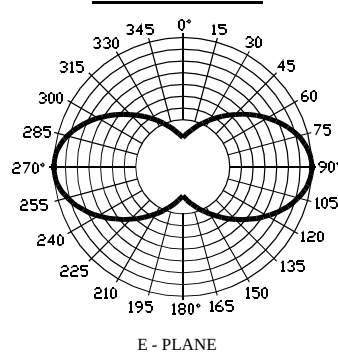

E - PLANE