


Type n° T-OD75/80.02

OMNIDIRECTIONAL ANTENNA 75 ÷ 80 MHz

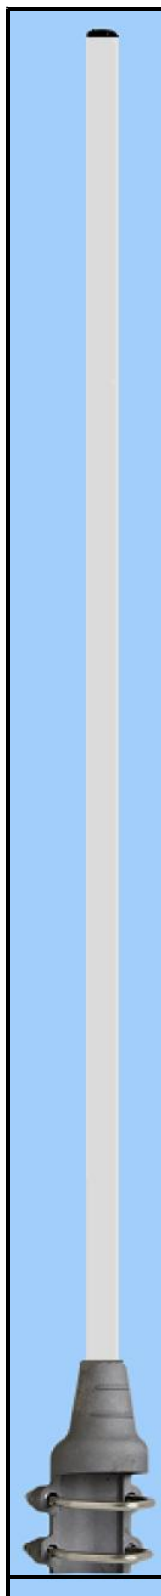

TECHNICAL DATA:

Impedance (Ohms):	50
Frequency range:	75 ÷ 80 MHz
V.S.W.R:	less than 1.6
Beamwidth -3 dB:	78°
Polarization:	Vertical
Connector:	N-female
Mounting:	on masts from 33 to 60 mm diam.

Gain (dBi):	2.14
Max power (W):	100
Wind resistance:	160 Km/Hr
Temperature (°C):	-40° - +85°
Dimensions (mm):	2500
Net weight (g):	2450

Material

Bracket:	Aluminium alloy EN AB-44100
Conic mast:	Epox glass
Screws and nuts:	Stainless steel

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

V.S.W.R. CURVE

