

OMNIDIRECTIONAL ANTENNA VHF 155-175 MHz

T-OD155/175.02

MATERIAL

Bracket: Aluminium alloy EN AB-44100



Conic mast: Epox glass white (d.top 20mm x d.bottom 24mm)

Screws and nuts: Stainless steel

TECHNICAL DATA:

Impedance (Ohms)	50
Frequency range	155 ÷ 175 MHz
V.S.W.R	Less than 1.6
Polarization	Vertical
Connector	N-female
Mounting	On masts from 33 to 60 mm diam.
Gain (dBi)	2
Max power (W)	150
Wind resistance	200 Km/h
Temperature (°C)	-40° - +85°
Dimensions (mm)	1400
Net weight (g)	1300

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

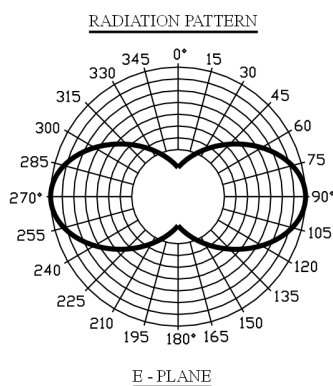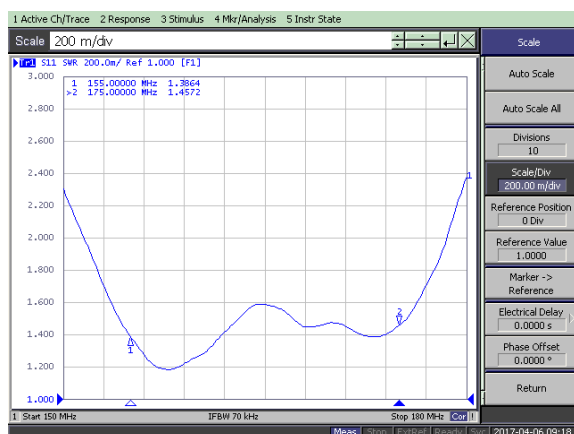

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060