OMNIDIRECTIONAL ANTENNA VHF 156-165 MHz

T-OD156/165.02

MATERIAL

Bracket: Aluminium alloy EN AB-44100

Conic mast: Epox glass

Screws and nuts: Stainless steel

TECHNICAL DATA:

Impedance (Ohms)	50
Frequency range	156 ÷ 165 MHz
V.S.W.R	Less than 1.5
Beamwidth -3 dB	78°
Polarization	Vertical
Connector	N-female
Mounting	On masts from 33 to 60 mm diam.
Gain (dBi)	2
Max power (W)	100
Wind resistance	260 Km/h
Temperature (°C)	-40° - +85°
Dimensions (mm)	1270
Net weight (g)	1200

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

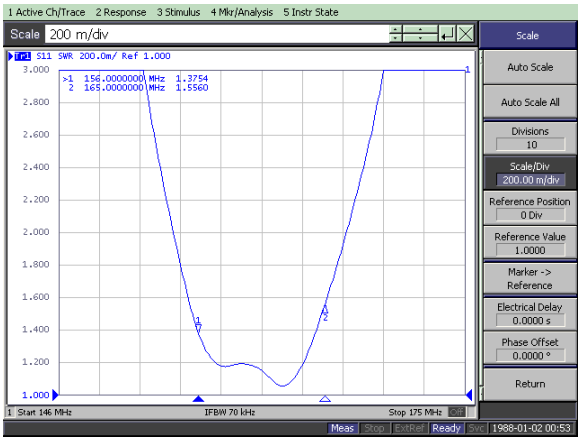

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060