

OMNIDIRECTIONAL ANTENNA UHF 400-430 MHz

T-OD400/430.02


MATERIAL

Bracket	Aluminium alloy EN AB-44100
Cylindric mast	Epox glass
Screws and nuts	Stainless steel

TECHNICAL DATA:

Impedance (Ohms)	50
Frequency range	400 ÷ 430 MHz
V.S.W.R	Less than 1.5
Polarization	Vertical
Connector	N-female
Mounting	On masts from 33 to 60 mm diam.
Gain (dBi)	2
Max power (W)	100
Wind resistance	180 Km/h
Temperature (°C)	-40° - +85°
Dimensions (mm)	550 +/- 10
Net weight (g)	1000

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

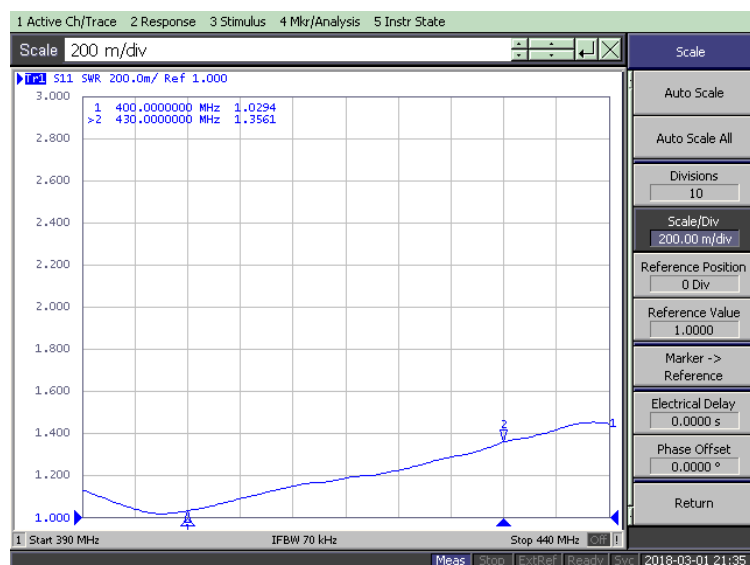

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060