



OMNIDIRECTIONAL ANTENNA UHF 430-470 MHz INOX T-OD430/470.02.NX

MATERIAL


Bracket Rivets and connector Mast Screws and nuts Isolation

Stainless steel "not" stainless steel Stainless steel PVC Black

TECHNICAL DATA

Impedance (Ohms) 50 430 ÷ 470 MHz Frequency range Less than 1.6 V.S.W.R Polarization Vertical Connector N-female Mounting On masts from 33 to 60 mm diam. Gain (dBi) 2 300 Max power (W) Wind resistance 160 Km/h Temperature (°C) -40° - +85° Dimensions (mm) $640 \pm 20*$ Ø55 Net weight (g) 1500 ± 100

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEMAND CONDENSING HOLE

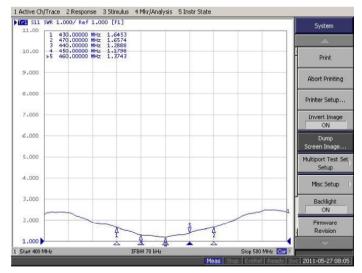



Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060