

OMNIDIRECTIONAL ANTENNA VHF 71-75 MHz

T-OD71/75.02.NX


MATERIAL

Bracket	Stainless steel
Rivets and connector	"not" stainless steel
Mast	Stainless steel
Screws and nuts	Stainless steel
Isolation	PVC Black

TECHNICAL DATA:

Impedance (Ohms)	50
Frequency range	71 ÷ 75 MHz
V.S.W.R	
71 ÷ 73MHz	Less than 2.5
73 ÷ 74.6MHz	Less than 1.5
74.6 ÷ 75MHz	Less than 2.5
Polarization	Vertical
Connector	N-female
Mounting	On masts from 33 to 60 mm diam.
Gain (dBi)	2.14
Max power (W)	> 100
Wind resistance	> 120 Km/h
Temperature (°C)	-40° - +85°
Max. Dimensions (mm)	2880*Ø90
Net weight (g)	6000 ± 500

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

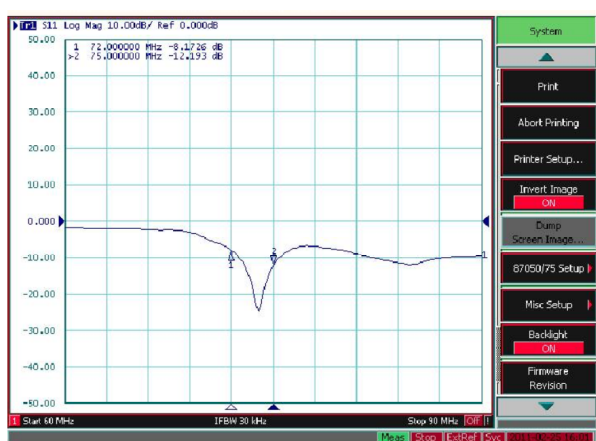

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060