

## OMNIDIRECTIONAL ANTENNA VHF 76-79 MHz

### T-OD76/79.02.AL

#### MATERIAL

Bracket: Stainless steel


Mast: Aluminium alloy EN AB-4410

Screws and nuts: Stainless steel

#### TECHNICAL DATA:

Impedance ( Ohms )	50
Frequency range	76 ÷ 79.2 MHz
V.S.W.R.	76.7-79.2 MHz Less than 1.6
Polarization	Vertical
Connector	N-female
Mounting	On masts from 33 to 60 mm diam.
Gain ( dBi )	2.14
Max power (W )	> 100
Wind resistance	> 120 Km/h
Temperature ( °C )	-40° - +85°
Max. Dimensions ( mm )	2880*Ø90
Net weight ( g )	5500 ± 200


#### DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

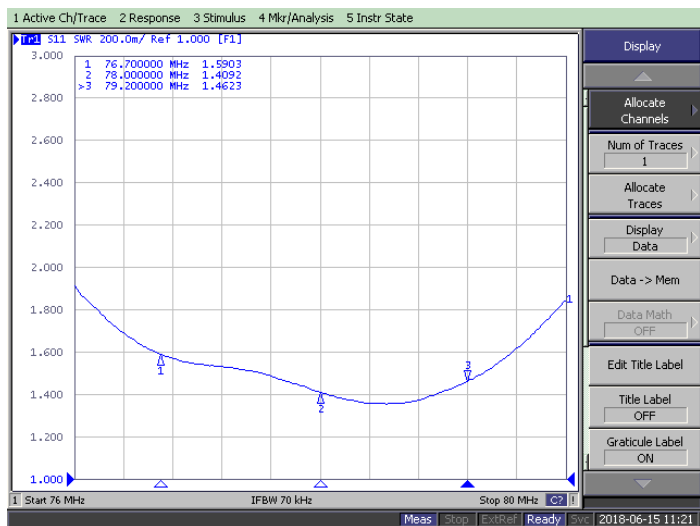

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: [www.atel-antennas.eu](http://www.atel-antennas.eu) - Mail: [commerciale@atel-antennas.eu](mailto:commerciale@atel-antennas.eu) - P. IVA 02442250060

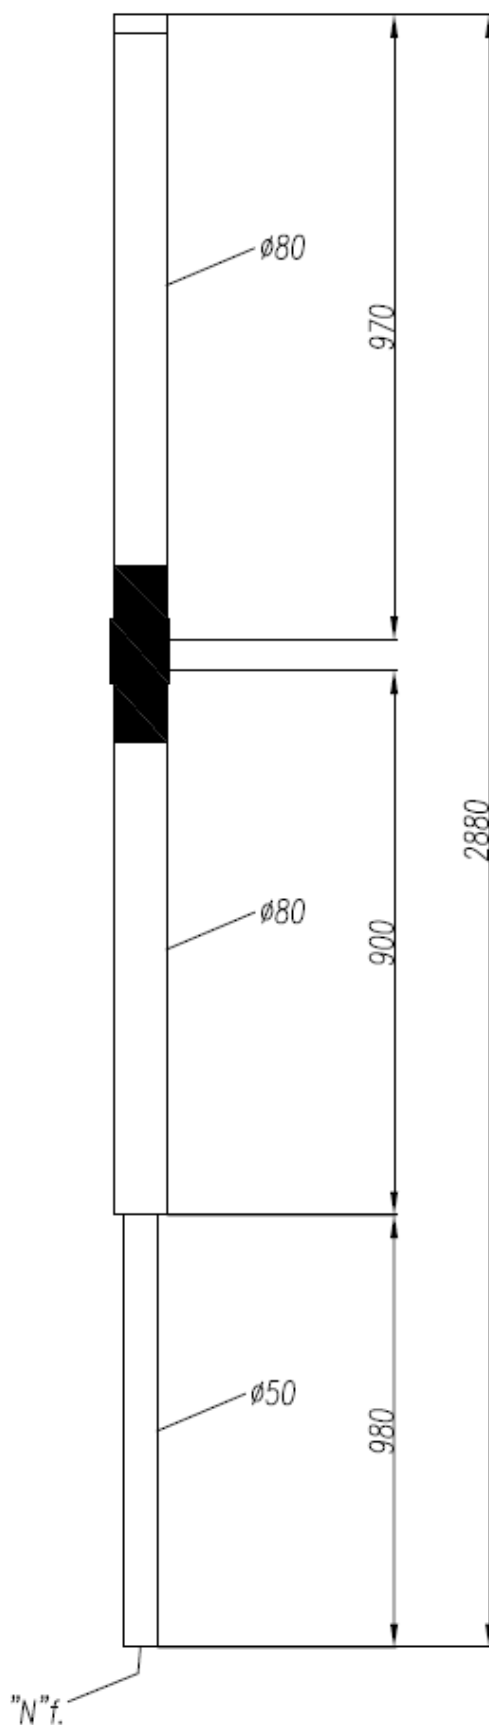

**Atel-Antennas S.r.l.**

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: [www.atel-antennas.eu](http://www.atel-antennas.eu) - Mail: [commerciale@atel-antennas.eu](mailto:commerciale@atel-antennas.eu) - P. IVA 02442250060