

OMNIDIRECTIONAL ANTENNA VHF 76-80 MHz

T-OD76/80.02.AL

MATERIAL

Bracket: Stainless steel


Mast: Aluminium alloy EN AB-4

Screws and nuts: Stainless steel

TECHNICAL DATA:

| | |
|------------------------|---------------------------------|
| Impedance (Ohms) | 50 |
| Frequency range | 76 ÷ 80 MHz |
| V.S.W.R | Less than 2.0 |
| | 76.7-79.2 MHz Less than 1.6 |
| Polarization | Vertical |
| Connector | N-female |
| Mounting | On masts from 33 to 60 mm diam. |
| Gain (dBi) | 2.14 |
| Max power (W) | > 100 |
| Wind resistance | > 120 Km/h |
| Temperature (°C) | -40° - +85° |
| Max. Dimensions (mm) | 2880*Ø90 |
| Net weight (g) | 5500 ± 200 |

DEVICE EQUIPPED WITH A DC GROUNDED SYSTEM AND CONDENSING HOLE

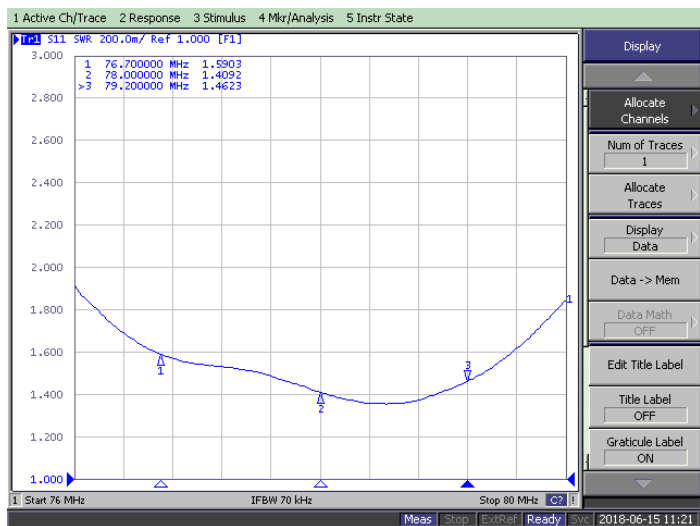

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060