
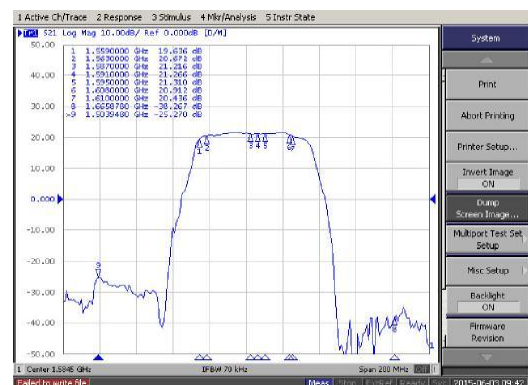
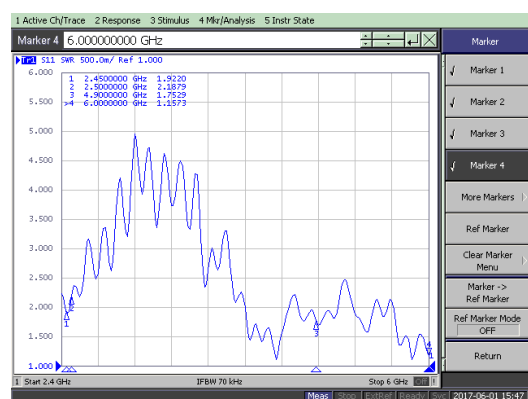


LOW PROFILE ANTENNA LTE/WLAN/ GPS-GNSS-GALILEO

T-BP654

SPECIFICATIONS

Material	
Base	Aluminium alloy EN AW-6082
Radome	Polycarbonate
Weight (g)	1000
Dimensions (mm)	106*160
Temperature (°C)	-40° - +80°
Mounting	Fixing hole Ø20

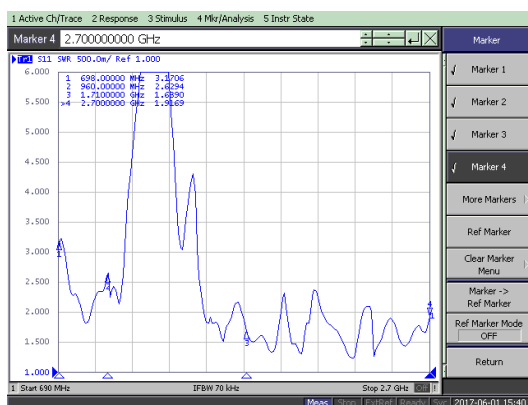

TECHNICAL DATA LTE

Frequency range:	AMPS/GSM 850 : 824-894 MHz GSM 900 : 880-960 MHz GSM 1800 : 1710-1800 MHz GSM 1900 : 1850-1990 MHz UMTS : 1920-2170 MHz LTE 700 : 746-793 MHz LTE 2700 : 2500-2690 MHz
Impedance (Ohm)	50
V.S.W.R	Less than 3
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	5 - 890 MHz 5 - 1710 MHz 2 - 2690 MHz
Cable	RG316 mm.500
Connector	SMA F.

TECHNICAL DATA WLAN

Frequency range:	2400-2485 MHz 5250-5850 MHz
Impedance (Ohm)	50
V.S.W.R.	Less than 3
Gain (dBi)	8.5 - 2400 MHz 9 - 5000 MHz
Polarization	Vertical
Emission	Omnidirectional
Cable	RG316 mm.500
Connector	SMA M.

TECHNICAL DATA GPS/GNSS/GALILEO

Antenna type	Active Planar Patch Antenna
Center frequency	1580 MHz
Bandwidth	± 28MHz
V.S.W.R	Less than 2.0
Impedance (Ohms)	50
Polarization	RHCP
Supply voltage	2.7 ÷ 5.1 V
Current absorption	10 ± 1 mA at 2.7 V. 16 ± 1 mA at 5.0 V.
Gain amplifier	18 ± 1 dB at 2.7 V. 22 ± 1 dB at 5.0 V.
Gain patch antenna	2 dB
Noise figure	1.7 ÷ 2.1 dB
Temperature (°C)	-30° - + 80°
Cable	RG174 mm.500
Connector	SMA M.

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060