
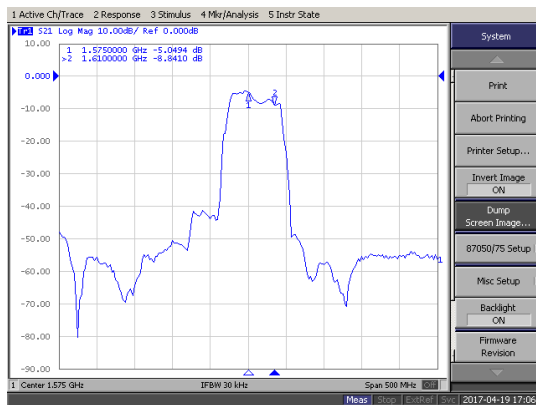


# LOW PROFILE MAGNETIC GSM / UMTS / ACTIVE GPS

T-AT105


## SPECIFICATIONS

Material	
Cap	Polyamide 6
Base	Zamac
Colour	Black
Net weight ( g )	210±10
Dimensions ( mm )	Ø73*22
Fixing	Magnetic
Temperature ( °C )	-40° - +80°

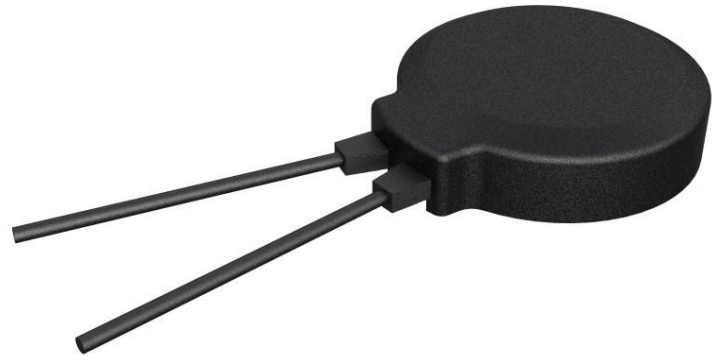

## TECHNICAL DATA GPS

Antenna type	Active Planar Patch Ant.
Center frequency	1575,42 & 1600 MHz
Bandwidth	10 MHz
V.S.W.R	Less than 2.0
Impedance ( Ohms )	50
Polarization	RHCP
Supply voltage (V)	2.7 ÷ 5
Gain (dB)	17 ± 2
Noise figure (dB)	< 1.5
Temperature ( °C )	-30° - + 80°
Cable lenght	RG 174 mm.3000±20
Connector	SMAM.

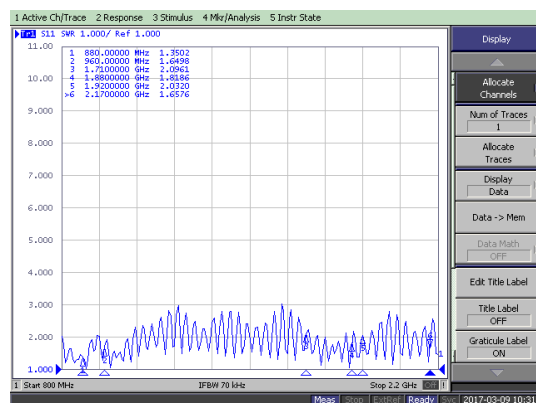

## TECHNICAL DATA TELEPHONE

Antenna type	Pifa Antenna
Frequency range	
GSM-ETACS-NNT	824 ÷ 960 MHz
PCN-GSM	1710 ÷ 1880 MHz
UMTS	1900 ÷ 2170 MHz
Impedance ( Ohms )	50
Max power ( W )	10
V.S.W.R. less than 2.5	Less than 2,5
Emission	Omnidirectional
Gain (dBi)	2.14
Cable lenght	RG 174 mm.3000±20
Connector	FME M.