OMNIDIRECTIONAL 2.4-5.8 GHz 4dBi ANTENNA “N” f

T-AT468 .04

SPECIFICATIONS

Material	
Base	Nickel plated brass
Cylindrical mast	RK15-25 IEMMEQU-3321 CE
Mounting	Pale

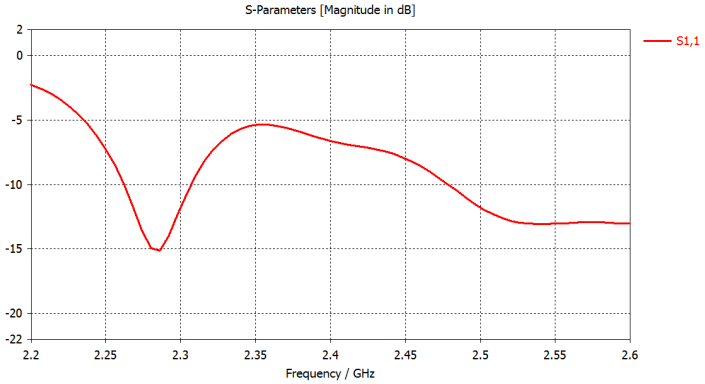

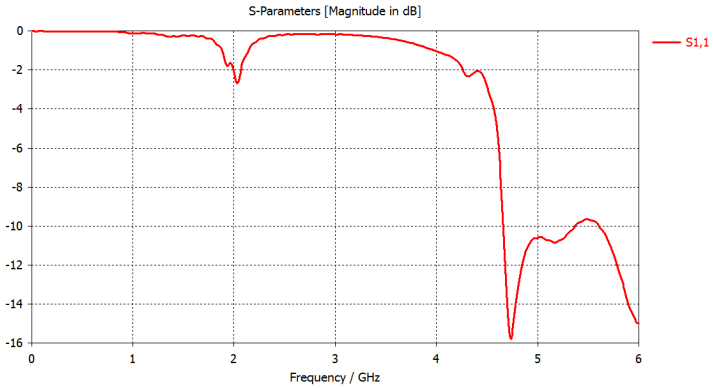

TECHNICAL DATA:

Frequency	2.4 ÷ 2.5 GHz / 5.3 ÷ 5.8 GHz
Polarization	Vertical
Connector	N-female
Gain (dBi)	
2.4 ÷ 2.5GHz	2
5.3 ÷ 5.8GHz	4
Max power (W)	10
Temperature (°C)	-40°C - +85°C
Dimensions (mm)	300 ±10 x Ø30
Net weight (g)	200 ±10

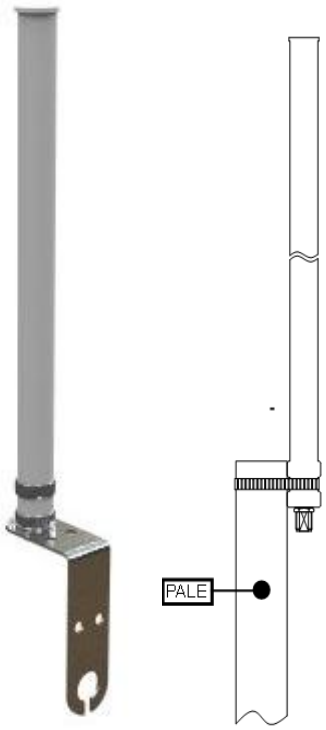

MOUNTING INSTRUCTIONS FOR TIGHTENING TUBE CLAMPS

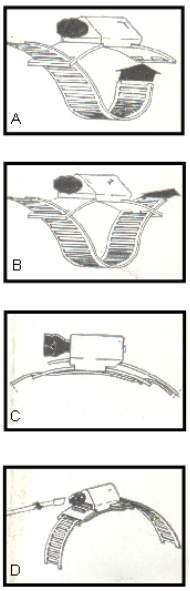

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060

2.4GHz

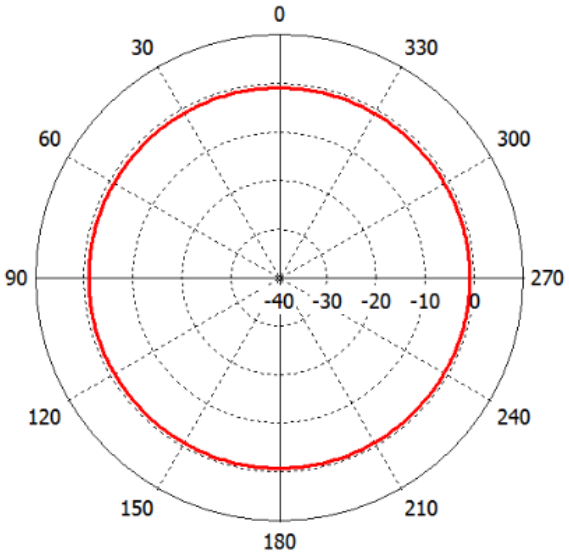

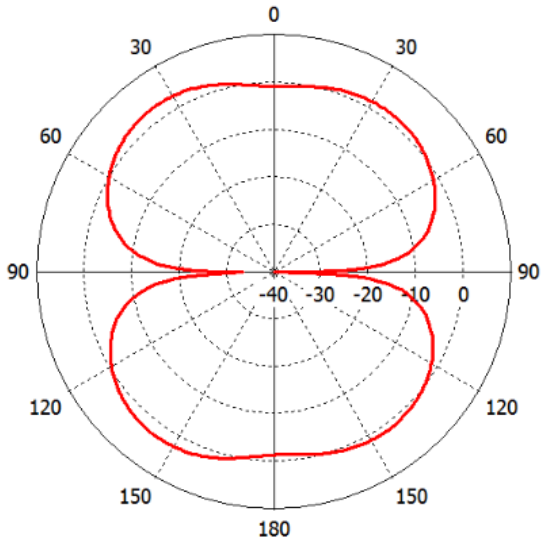

5.8GHz

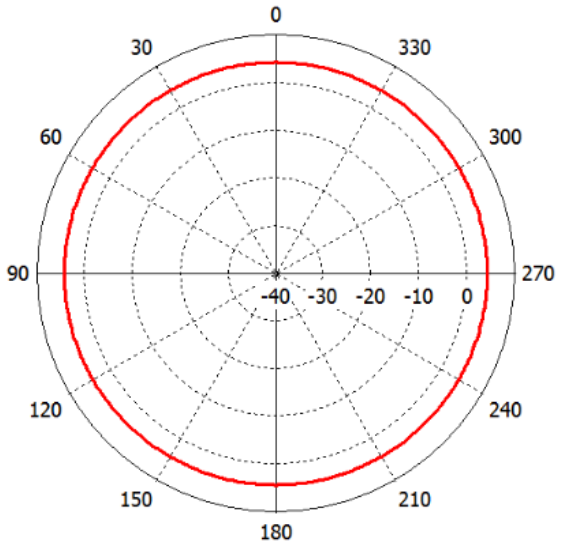

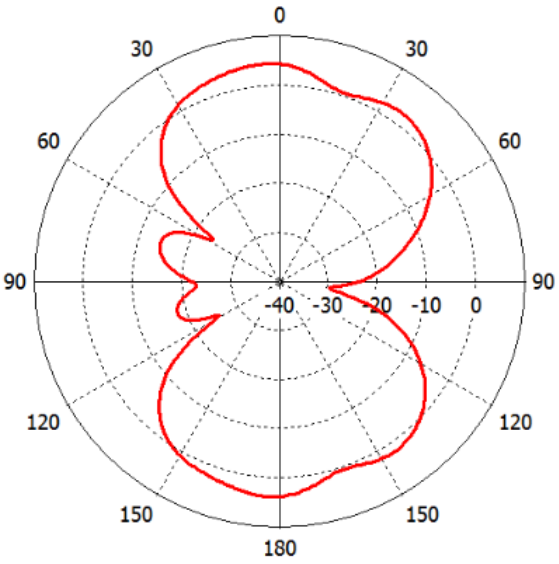

Atel-Antennas S.r.l.
Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy
Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060