


OMNIDIRECTIONAL LTE ANTENNA

T-AT494

SPECIFICATIONS

Material	
Base	Nickel plated brass
Cylindric mast	PVC Halogen free (GEWISS RK15 Series)
Colour	RAL7035
Dimensions (mm)	260±10 x Ø30
Weight (g)	230±20
Temperature (°C)	-30° - +80°
IP Class Protection	IP66 certified

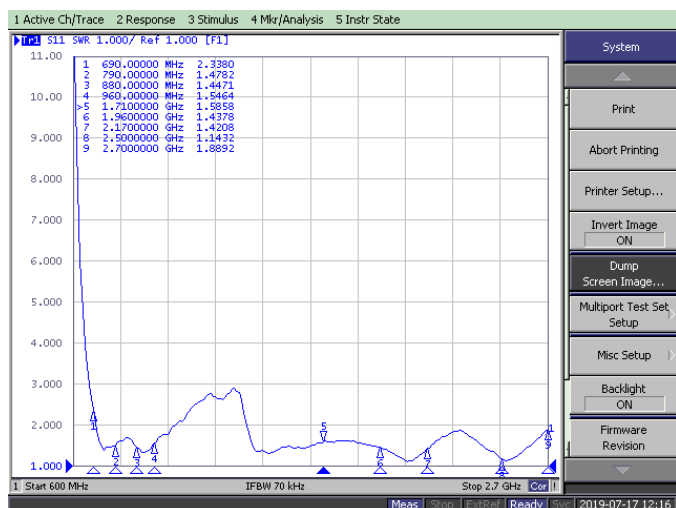

TECHNICAL DATA LTE

Antenna type	Dipole Antenna
Frequency range LTE	690 ÷ 960 Mhz - 1710 ÷ 2700 Mhz
Impedance(Ohms)	50
Max power (W)	25
V.S.W.R. (See plot)	690 ÷ 790 MHz < 2,5 790 ÷ 960 MHz < 1.8 1710 ÷ 2700 MHz < 2,0
Gain (dBi)	2.14
Polarization	Vertical
Emission	Omnidirectional
Connector	N female