OMNIDIRECTIONAL LTE ANTENNA 5dBi

T-AT495.01

SPECIFICATIONS

Material	ABS / PVC / MOPLEN
Colour	Grey
Weight (g)	380
Dimensions (mm)	340*50 H=155
Temperature (°C)	-30° - +80°
Mounting	On pale or on wall

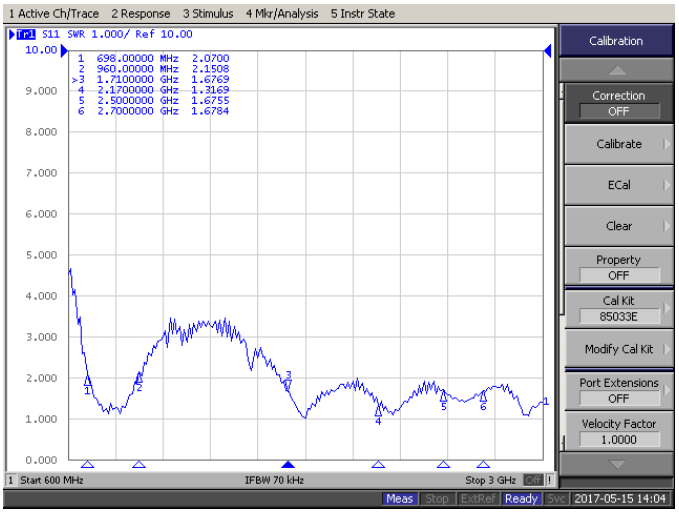

TECHNICAL DATA LTE

Antenna type	Omnidirectional LTE Antenna
Frequency range	698 ÷ 960 MHz
	960 ÷ 1710 MHz
	1710 ÷ 2170 MHz
	2400 ÷ 2500 MHz
	2500 ÷ 2700 MHz
Impedance (Ohms)	50
Max power (W)	25
V.S.W.R.	698 ÷ 960 less than 2.5
	960 ÷ 1710 less than 2.5
	1710 ÷ 2170 less than 2
	2400 ÷ 2500 less than 2
	2500 ÷ 2700 less than 2
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	5
Cable	CO100B mm. 7500
Connector	FME f.

MOUNTING ON PALE

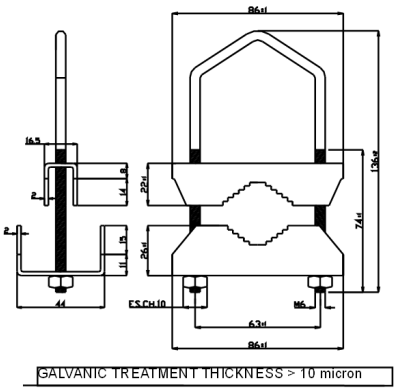

MOUNTING ON WALL

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060