

OMNIDIRECTIONAL LTE ANTENNA 5dBi

T-AT495


SPECIFICATIONS

Material	ABS / PVC / MOPLIN
Colour	Grey
Weight (g)	380
Dimensions (mm)	340*50 H=155
Temperature (°C)	-30° - +80°
Mounting	On pole or on wall




TECHNICAL DATA LTE

Antenna type	Omnidirectional LTE Antenna
Frequency range	698 ÷ 960 MHz 960 ÷ 1710 MHz 1710 ÷ 2170 MHz 2400 ÷ 2500 MHz 2500 ÷ 2700 MHz
Impedance (Ohms)	50
Max power (W)	10
V.S.W.R.	698 ÷ 960 less than 2.5 960 ÷ 1710 less than 2.5 1710 ÷ 2170 less than 2 2400 ÷ 2500 less than 2 2500 ÷ 2700 less than 2
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	5
Cable	CO100 mm. 5000
Connector	SMA m or at request

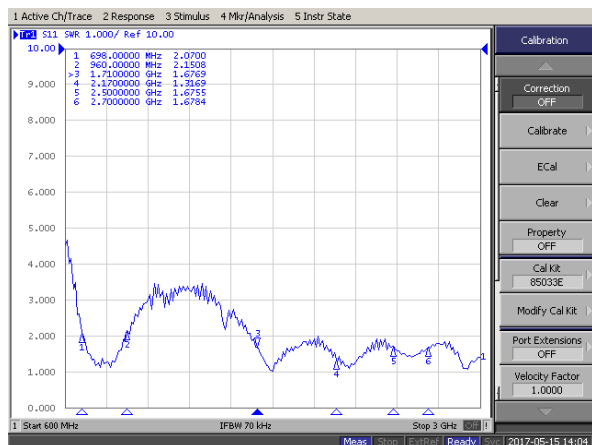

MOUNTING ON PALE

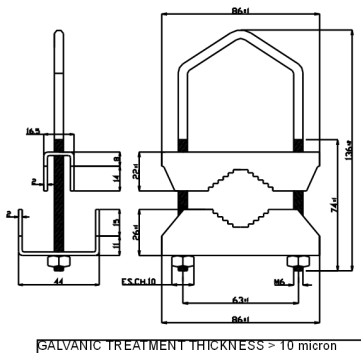

MOUNTING ON WALL

