
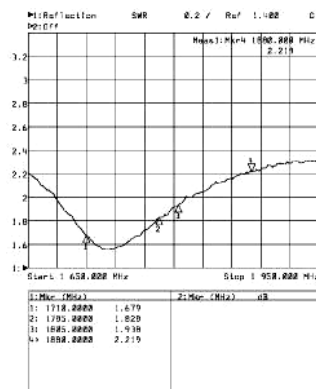


DIRECTIVE GSM ANTENNA T-AT850BAS

SPECIFICATIONS

| | |
|-----------------|--|
| Dimension | 230x170x70 mm |
| Material | Aluminum + shock-resistant Polystyrene |
| Colour | Gray |
| Weight | 470 g |
| Temperature | From -35°C to +80°C; |
| Mounting | On Pale (from Ø20 to Ø55 mm); |
| Wind resistance | 120 Km/h |

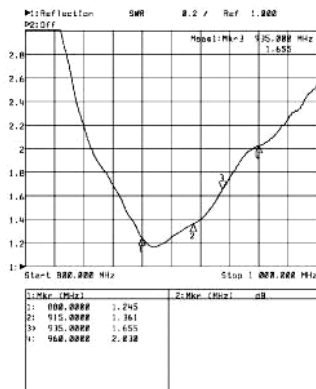

TECHNICAL DATA TELEPHONE

| | |
|-------------------|--|
| Antenna type | Directive Antenna |
| Frequency range | GSM-ETACS-NMT 890÷960 MHz PCN-GSM 1710÷1880 MHz |
| Impedance | 50 Ω |
| Maximum rated RF | 50 W |
| Polarization | Vertical |
| Emission | Directive |
| W.S.W.R. 900 MHz | < 1.5 |
| W.S.W.R. 1800 MHz | < 2.0 |
| Gain | 10 dBd |
| Panel Connector | “N”f |

