


DIRECTIVE ANTENNA GSM/UMTS

T-AT880


SPECIFICATIONS

Material	
Base	ABS / Chromium plated
Cover	Gray ABS
Dimensions (mm)	162*142*45
Wind resistance	120 Km/h
Mounting (mm)	On pale (from Ø20) or on wall
Temperature (°C)	-30° - +80°

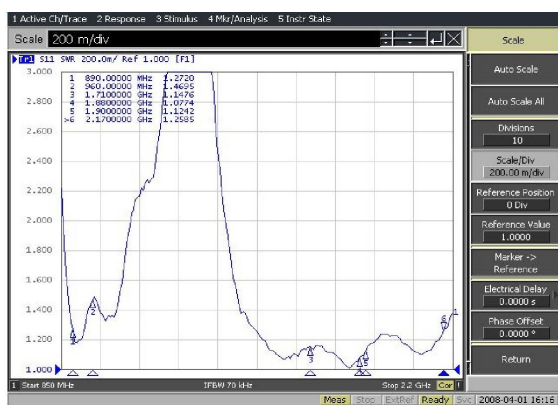


TECHNICAL DATA GSM / UMTS

Antenna type	Directive Antenna
Frequency range	890 ÷ 960 MHz
GSM-ETACS-NNT	1710 ÷ 1880 MHz
PCN-GSM	1920 ÷ 1990 MHz
UMTS	2110 ÷ 2170 MHz
	1900 ÷ 1920 MHz
	2010 ÷ 2025 MHz
Impedance (Ohms)	50
Max power (W)	50
	V.S.W.R. 900 less than 2.0
	V.S.W.R. 1800 less than 1.5
	V.S.W.R. UMTS less than 1.5
Polarization	Vertical
Emission	Directive
Gain (dBi)	10
Cable	CO100 mm.5000
Connector	SMA m.

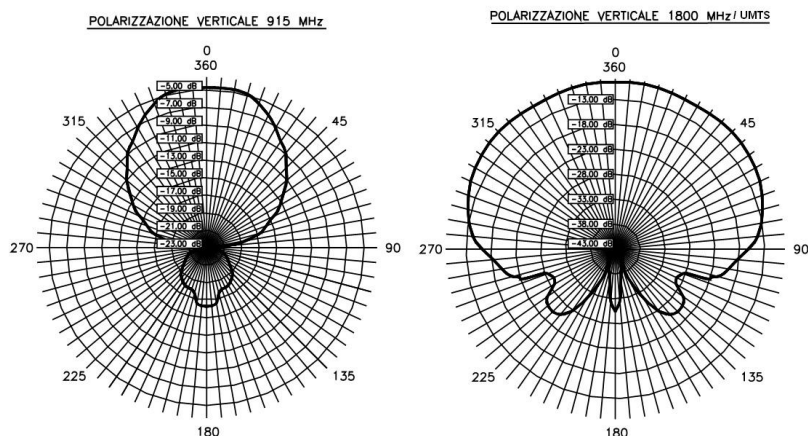

MOUNTING ON PALE (FROM Ø20)

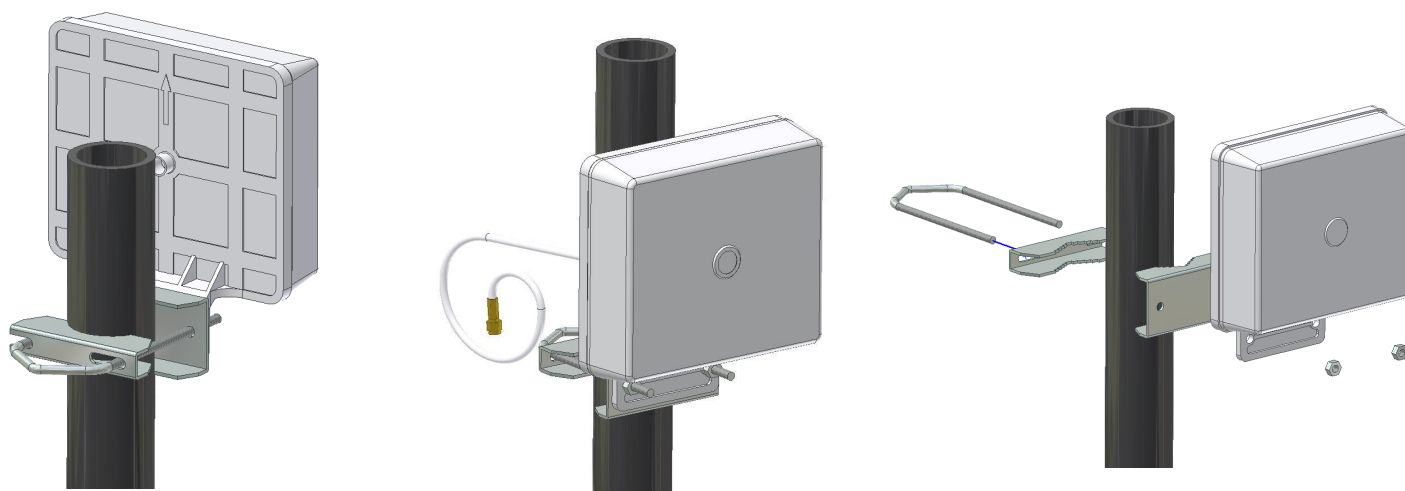

MOUNTING ON WALL

