


DIRECTIVE ANTENNA LTE T-AT883.05

SPECIFICATIONS

Material	
Base	ABS
Cover	ABS
Colour	Grey
Dimensions (mm)	162*142*45
Wind resistance	120 Km/h
Mounting (mm)	On pale (from Ø20) or on wall
Temperature (°C)	-30° - +80°

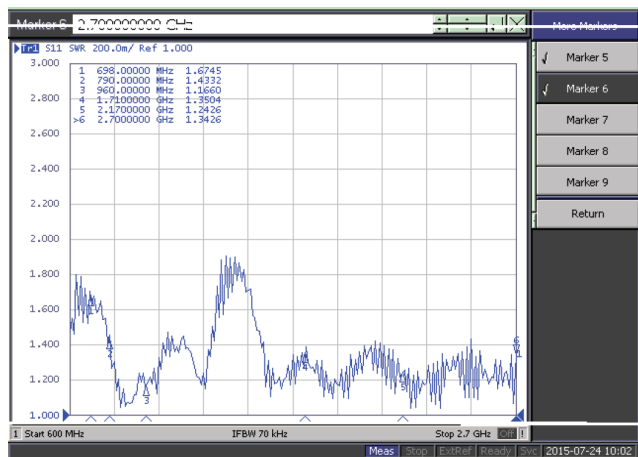

TECHNICAL DATA LTE

Antenna type	Directive Antenna
Frequency range	
LTE	680 ÷ 790 MHz 790 ÷ 960 MHz 1710 ÷ 2700 Mhz
Impedance (Ohms)	50
Max power (W)	50
	V.S.W.R. 680 - 790 less than 2.0 V.S.W.R. 790-960 less than 1.5 V.S.W.R. 1710—2700 less than 1.5
Polarization	Vertical
Emission	Directive
Gain (dBi)	10
Cable	CO100B mm.7500
Connector	FME f.

HORIZONTAL INCLINATION ANGLE -45° / +45° MOUNTING ON PALE (FROM Ø20)



HORIZONTAL INCLINATION ANGLE -45° / +45° MOUNTING ON WALL

