

GPS-GNSS / LTE / 74÷82MHz / 380÷410MHz with tunable diplexer

T-AT9925



SPECIFICATIONS:

Material	
Cap	Polyamide 6
Gasket	Arnitel EP 400
Rod.	Pibiflex 2564
Colour	Black
Base dimensions (mm)	
Length	95
Width	52
Mounting hole (mm)	
Squared	15*15
Round	Ø 19
Temperature (°C)	-30° - +80°



TECHNICAL DATA GPS/GNSS GALILEO

Antenna type	Active Planar Patch Antenna
Center frequency	1580 MHz
Bandwidth	± 28MHz
V.S.W.R	Less than 2.0
Impedance (Ohms)	50
Polarization	RHCP
Supply voltage	2.7 ÷ 5.1 V
Current absorption	10 ± 1 mA at 2.7 V. 16 ± 1 mA at 5.0 V.
Gain amplifier	18 ± 1 dB at 2.7 V. 22 ± 1 dB at 5.0 V.
Gain patch antenna	2 dB
Noise figure	1.7 ÷ 2.1 dB
Temperature (°C)	-30° - + 80°
Cable lenght	RG 174 mm.180±20
Connector	SMAM.
Extension cable	RG 174 mm.4000 SMA F. / FME M.

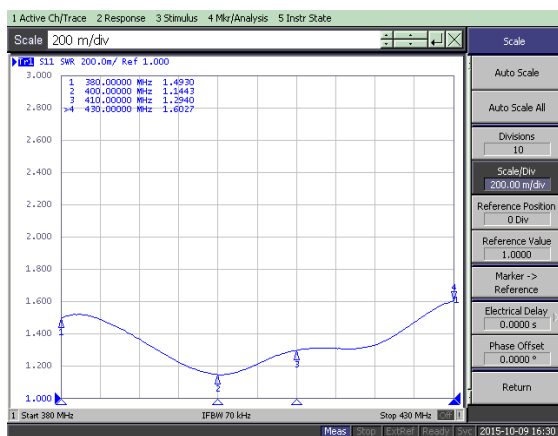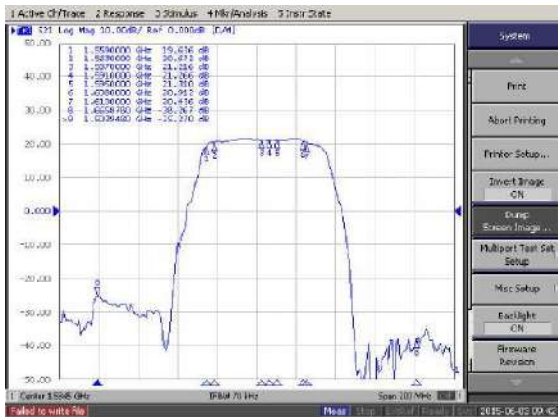

TECHNICAL DATA UHF:

Antenna type	1/4 l Mobile Antenna
Frequency range	380 ÷ 410 MHz
Impedance (Ohms)	50
Max power (W)	10
V.S.W.R.	less than 2
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	2.14
Rod lenght (mm)	585 ± 10
Rod section	1
Rod elevation	74°
Cable lenght	RG 174 mm.180±20
Connector	FME M.
Extension cable 1	RG 58 mm.2372 TNC M. / FME F.
Extension cable 2	RG58 mm.1500 BNC M./BNC M.

TECHNICAL DATA 74-82 MHz:

Antenna type	1/4 1 Mobile Antenna
Frequency range	74 ÷ 82 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R	less than 2.5
Polarization	Vertical
Emission	Omnidirectional
Cable lenght	RG 174 mm.180±20
Connector	FME M.
Extension cable 1	RG 58 mm.2372 TNC M. / FME F.
Extension cable 2	RG58 mm.1500 BNC M./BNC M.

TECHNICAL DATA LTE

Antenna type	1/4 1 Mobile Antenna
Frequency range	790 ÷ 960 MHz 1710 ÷ 2700 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R	less than 3.0
Polarization	Vertical
Emission	Omnidirectional
Cable lenght	RG 174 mm. 280±20
Connector	FME M.
Extension cable 1	RG 58 mm.5000 FME F./ SMA M.