


ANT.28° MONT-ANTER.78MHz - 380÷400MHz + DIPLEX. T-AU011


SPECIFICATIONS:

Material	
Cap	Polyamide
Gasket	Arnitel EP
Rod	Pibiflex 2564
Colour	Black
Base dimensions (mm)	
Length	60
Width	45
Mounting hole (mm)	
Squared	15*15
Round	Ø 19
Temperature (°C)	-30° - +80°

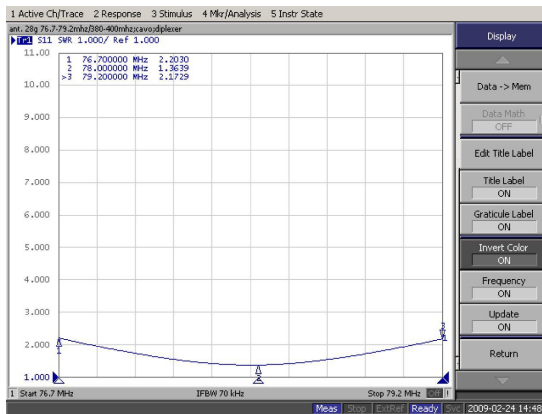

TECHNICAL DATA 78MHz

Antenna type	1/4 λ Mobile Antenna
Frequency range	76.7 ÷ 79.2 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R	Less than 2.2
Polarization	Vertical
Cable length	RG 174 mm.330±20
Connector	FME f.
Extension cable 1	RG 58 mm.2660
Extension cable 2	TNC m. / FME m. RG58 mm.1500 BNC m./BNC m.

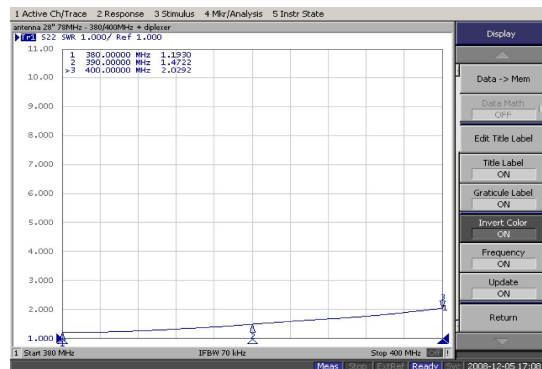

TECHNICAL DATA UHF

Antenna type	1/4 λ Mobile Antenna
Frequency range	380 ÷ 400 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R.	Less than 2.5
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	2.14
Rod length (mm)	560 ± 10
Rod section	1
Rod elevation	28°
Cable length	RG 174 mm.330±20
Connector	FME f.
Extension cable 1	RG 58 mm.2660
Extension cable 2	TNC m. / FME m. RG58 mm.1500 BNC m./BNC m.