


LOW PROFILE ANTENNA 4G/LTE

T-AT145

SPECIFICATIONS

Material	
Cap	Polyamide 6
Base	Zamac
Colour	Black
Net weight (g)	162±10
Dimensions (mm)	Ø73*22
Mounting hole (mm)	
Squared	15.4*15.4
Round	Ø 16
Temperature (°C)	-40° - +80°
Protection class	IP67

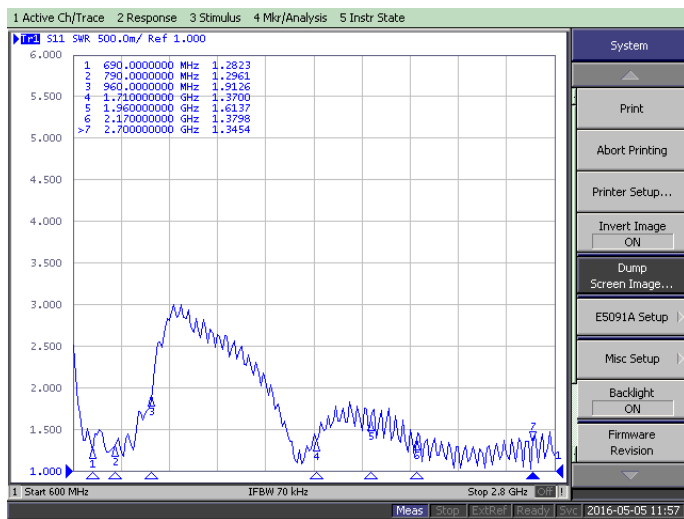

TECHNICAL DATA LTE

Frequency range

AMPS/GSM 850 :	824 - 894MHz
GSM 900 :	880 - 960MHz
GSM 1800 :	1710 -1880 MHz
GSM 1900:	1850 - 1990 MHz
UMTS :	1920 - 2170 MHz
LTE700 :	746 - 793 MHz
LTE2700 :	2500 - 2690 MHz

Impedance (Ohms)	50
Max power (W)	10
V.S.W.R.	Less than 2.2
Emission	Omnidirectional
Gain	2.5 ± 1 dBi 698-960 Mhz 3.5 ± 1 dBi 1710-2170 Mhz 2±1 dBi 2300-2690 Mhz

Cable length	RG 174 mm.2000
Connector	SMA M.