TETRA ANTENNA 380-430 MHz

T-AT175

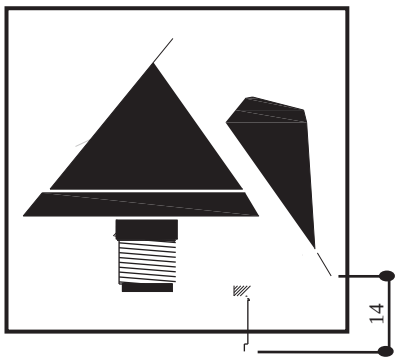

SPECIFICATIONS:

Material	
Cap:	Polyamide 6
Gasket:	Pibiflex 4612
Rod.	Pibiflex 4612
Colour:	Black
Net weight (g):	80±20
Base dimensions (mm)	
Lenght:	64
Width:	46
Mounting hole (mm)	
Squared:	15*15
Round:	Ø 19
Temperature (°C):	-30° - +80°

TECHNICAL DATA TETRA and UHF:

Antenna type:	1/4 l Mobile Antenna
Impedance (Ohms):	50
Max power (W):	20
V.S.W.R.:	less than 2.0
Polarization:	Vertical
Emission:	Omnidirectional
Gain (dBi):	2.14
Rod section:	1
Rod elevation:	74°
Cable lenght:	RG 58 mm.5000 BNC M.

V.S.W.R. CURVE

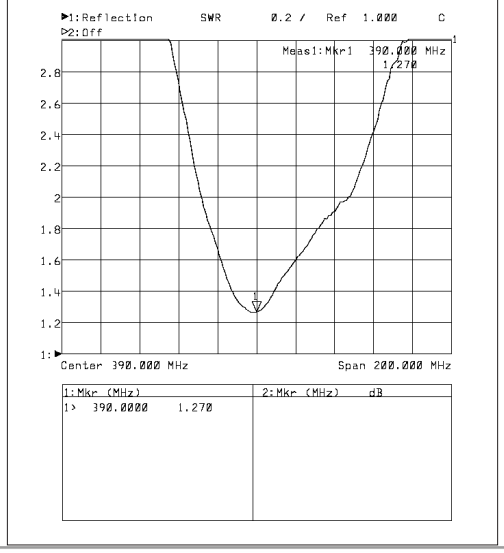

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060