

TETRA ANTENNA 28° FRONT MOUNTING 380-430 MHz

T-AU013.01


SPECIFICATIONS:

Material	
Cap	Polyamide 6
Gasket	Armitel EP 400
Rod.	Pibiflex 2564
Colour	Black
Base dimensions (mm)	
Lenght	60
Width	45
Mounting hole (mm)	
Squared	15*15
Round	Ø 19
Temperature (°C)	-30° - +80°



TECHNICAL DATA TETRA

Antenna type	5/8 l Mobile Antenna
Frequency range	380 ÷ 430 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R.	Less than 2.3
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	5
Rod lenght (mm)	500 ± 10
Rod section	1
Rod elevation	28°
Cable lenght	RG 174 mm.330±20
Connector	FME f.
Extension cable l	RG 58 mm.5000±20 TNC m. / FME m.

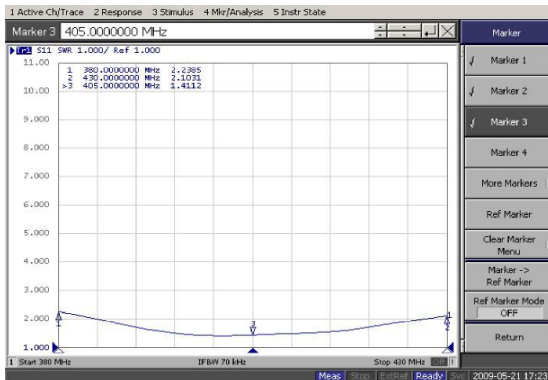

Atel-Antennas S.r.l.

Viale Caduti sul Lavoro, 21/A - 15061 Arquata Scrivia (AL) - Italy

Tel. +39 0143 635496 - Fax +39 0143 666423 - Website: www.atel-antennas.eu - Mail: commerciale@atel-antennas.eu - P. IVA 02442250060