
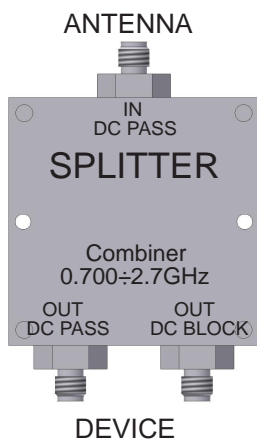


# DIVIDER-COMBINER-SPLITTER 700/2700 MHz 2 WAYS

T-SP700/2700.02

## MECHANICAL SPECIFICATIONS


Connectors	SMA female(JACK)50ohm
Operating temp.	-65°C to +85°C
Weight	133grams
Dimension	50.3x50.3x22.2(mm)

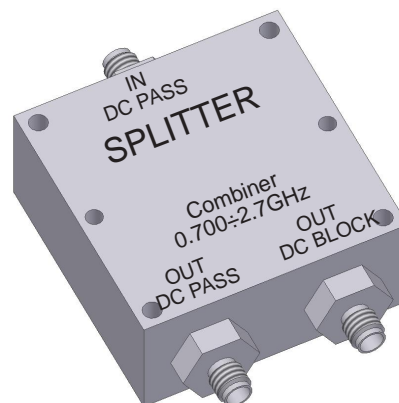

## ELECTRICAL SPECIFICATIONS

Frequency range	700 ÷ 2700 MHz
Impedance ( Ohms )	50
Insertion loss (MAX)	3.3 ± 0.3dB
Amplitude balance (MAX)	0.2dB
Phase balance (MAX)	3 DEGREES
Isolation (MIN)	22dB
DC voltage (MAX)	50Volts
Max power	1W

## INSERTION LOSS

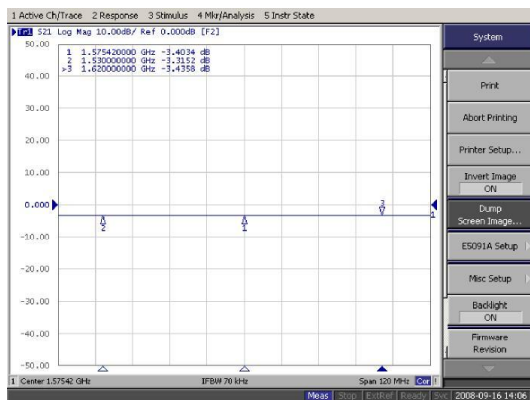

## RETURN LOSS

