

Type n° T-AU013.01

ANTENNA 28° FRONT MOUNTING 380÷430 MHz

SPECIFICATIONS:

Material

Cap: Polyamide 6
Gasket: Arnitel EP 400
Rod: Pibiflex 2564

Colour: Black

Base dimensions (mm)

Length: 60
Width: 45

Mounting hole (mm)


Squared: 15*15
Round: Ø 19

Temperature (°C): -30° - +80°



TECHNICAL DATA TETRA:

Antenna type:	5/8 1 Mobile Antenna
Frequency range:	380 ÷ 430 MHz
Impedance (Ohms):	50
Max power (W):	20
V.S.W.R.:	less than 2.3
Polarization:	Vertical
Emission:	Omnidirectional
Gain (dBi):	5
Rod lenght (mm):	500 ± 10
Rod section:	1
Rod elevation:	28°
Cable lenght:	RG 174 mm.330±20
Connector:	FME f.
Extension cable 1:	RG 58 mm.5000±20 TNC m. / FME m.

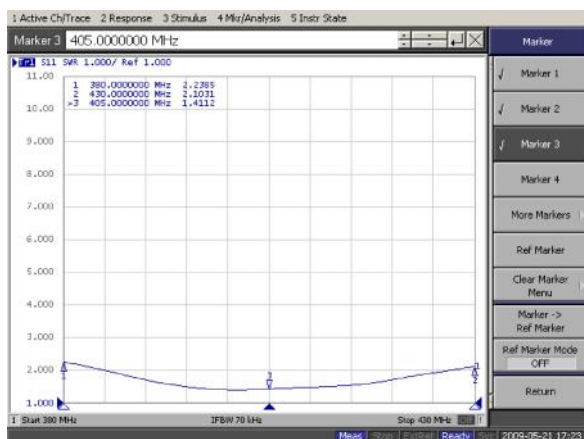

Atel-Antennas S.r.l.

Via del Mulino , 8D/2 - 15061 Arquata Scrivia (AL) - **Headquarter:** Viale Caduti sul Lavoro , snc - 15061 Arquata Scrivia (AL) - Italy
Tel: +39 0143 635496 ; Fax: +39 0143 666423 - Mail: commerciale@atel-antennas.eu - P.IVA: 02442250060