


ACTIVE GPS-GNSS-GALILEO / 410 ÷ 470 MHz ANTENNA T-AT988.01


SPECIFICATIONS:

Material	
Cap	Polyamide 6
Gasket	Armitel EP 400
Rod	Moplen + Rubber 50 Sh.
Colour	
Black	
Net weight (g)	
210	
Base dimensions (mm)	
Lenght	95
Width	52
Mounting hole (mm)	
Squared	15*15
Round	Ø 19
Temperature (°C)	
-30° - +80°	

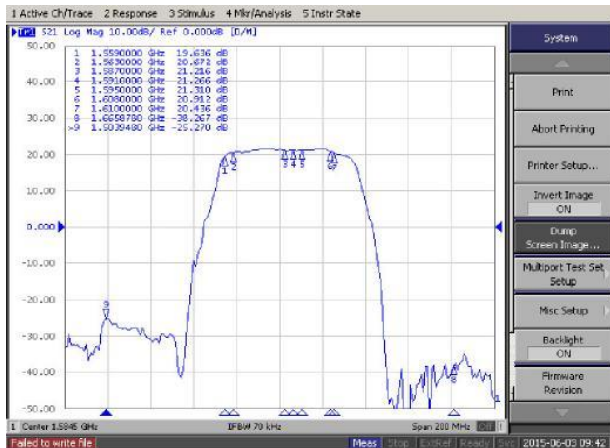

TECHNICAL DATA GPS/GNSS/GALILEO

Antenna type	Active Planar Patch Antenna
Center frequency	1580 MHz
Bandwidth	± 28MHz
V.S.W.R	Less than 2.0
Impedance (Ohms)	50
Polarization	RHCP
Supply voltage	2.7 ÷ 5.1 V
Current absorption	10 ± 1 mA at 2.7 V. 16 ± 1 mA at 5.0 V.
Gain amplifier	18 ± 1 dB at 2.7 V. 22 ± 1 dB at 5.0 V.
Gain patch antenna	2 dB
Noise figure	1.7 ÷ 2.1 dB
Temperature (°C)	-30° - + 80°
Cable	RG 174 mm. 180±20
Connector	SMA M.
Extension cable	RG174 mm.5000±50 SMA F. / FAKRA F. "C" WATERPROOF

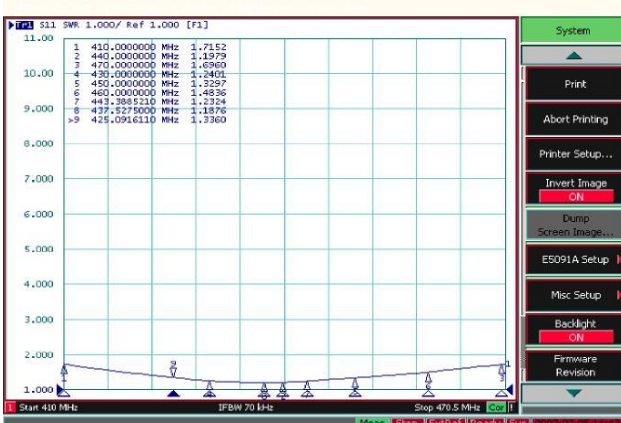

TECHNICAL DATA 410÷470 MHz

Antenna type	1/4 l Mobile Antenna
Frequency range	410 ÷ 470 MHz
Impedance (Ohms)	50
Max power (W)	20
V.S.W.R.	less than 1.8
Polarization	Vertical
Emission	Omnidirectional
Gain (dBi)	2.14
Rod lenght (mm)	118±5
Rod section	1
Rod elevation	74°
Cable length	RG316 mm.150±20
Connector	FME M.
Extension cable	RG58 mm.5000±50 FME F./TNC M.